

Photograph courtesy Naue



GEOGRIDS PRODUCT DATA

FOR MORE INFORMATION

Geosynthetics magazine has provided information on the geogrid specification charts for comparative purposes only. Designers should contact manufacturers for additional details and to discuss site-specific considerations.

Information on the use and specification of geogrids is also available from the Geosynthetic Materials Association (GMA).

GMA
1801 County Road B West, Suite 100
Roseville, MN 55113-4052 USA
+1 651 225 6981
fax +1 651 631 9334
fred.chuck@textiles.org
GMAnow.com

PUBLISHER'S NOTE

Geosynthetics magazine compiled all information included in the 2023 *Geosynthetics Specifier's Guide* from information submitted by firms in the geosynthetics industry. Companies provided specifications voluntarily, and specification accuracy is the responsibility of the manufacturer. The appearance of a listing in this directory is not an endorsement of the company or product by *Geosynthetics* magazine or the Advanced Textiles Association (ATA). The 2023 *Geosynthetics Specifier's Guide* is intended as a guide, and *Geosynthetics* magazine and ATA encourage readers to contact the companies listed for further information.

Manufacturers design geogrids for reinforcement and, characteristically, these products are integrally connected to elements separated by in-plane apertures.

Geogrids form a distinct category of geosynthetics designed for reinforcement. These products are characterized by a relatively high tensile strength and a uniformly distributed array of large apertures (openings between the longitudinal and transverse elements). The apertures allow soil particles on either side of the installed sheet to come into direct contact, thereby increasing the interaction between the geogrid and some soils. Also, the apertures ensure vertical drainage of a reinforced free-draining soil.

The geogrid elements vary in polymer type and cross-sectional dimensions. They can sometimes change shape and dimensions within their length. Geogrids are either integrally manufactured, ultrasonically or adhesive bonded, or joined in a knitting or weaving process and then coated.

Although engineers use geogrids primarily for reinforcement, geogrids are also used for asphalt overlay and waterproofing, and for separation and stabilization. In addition, geogrids are used as gabions and sheet anchors, inserted between geotextiles and geomembranes, and used to construct mattresses for fills or embankments over soft soils.

The numbers

Companies that submitted product data chart lines were asked to provide data determined through industry-accepted testing methods. Companies were asked to sign a certificate of compliance verifying the accuracy of this data.

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m² (oz/yd²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
ACE Geosynthetics Inc. www.geoace.com													
ACEGrid GG1000-I	woven	PET	PVC	NP			250 (17109)	NP	1000 (68440)	100 (6845)	709 (48522)	689 (47153)	W, S, E
ACEGrid GG400-II	woven	PET	PVC	NP			120 (8215)	NP	400 (27375)	400 (27375)	284 (19436)	275 (18820)	W, S, E
ACEGrid GG200-II FR	woven	PET	Flame-retardant polymer	NP	30 (1.2)	30 (1.2)	NP	NP	200 (13687)	200 (13687)	NA	NA	W, S, E (Flame-retardant)
AFITEX-Texel Geosynthetics Inc. www.draintube.net													
NOTEX GLASS C 100-100/40 AN	Warp-Knitting	FG	Polymeric	414 (12)	40 (1.6)	40 (1.6)	NA	NA	100 (6852) / 2.6	100 (6852) / 2.6	NA	NA	A/O, PR
NOTEX C 55/20-25	Warp-Knitting	PET	Polymeric	132 (3.9)	25 (1.0)	40 (1.6)	21.7 (1486.5)	7.9 (541.3)	55 (3769) / 10	20 (1370) / 10	NP	NP	R, AE
NOTEX C 70/20-25	Warp-Knitting	PET	Polymeric	160 (4.7)	25 (1.0)	40 (1.6)	26.3 (1802)	7.9 (541.3)	70 (4796) / 10	20 (1370) / 10	NP	NP	R, AE
Carthage Mills www.gxgeogrids.com													
GX-300	Woven	PET	PVC	NA	22 (0.87)	25 (0.98)	15.7 (1,080)	N.A.	47.3 (3,250)	NA	32.2 (2,211)	27.4 (1,879)	E, S, SI, W
GX-500	Woven	PET	PVC	NA	22 (0.87)	25 (0.98)	17.4 (1,202)	N.A.	65.5 (4,500)	NA	44.6 (3,061)	37.9 (2,601)	E, S, SI, W
GX-800	Woven	PET	PVC	NA	23 (0.91)	23 (0.91)	29.5 (2,023)	N.A.	106.6 (7,315)	NA	72.5 (4,976)	61.6 (4,228)	E, S, SI, W
Geosynthetic Solutions www.geosyntheticsolutions.com													
3D-T Triplanar Grid	Integrally formed	PP	N/A	N/A	32 (1.26)	32 (1.26)	N/A	N/A	N/A	N/A	N/A	N/A	SI, B
3D-HT Triplanar Grid	Integrally formed	PP	N/A	N/A	32 (1.26)	32 (1.26)	N/A	N/A	N/A	N/A	N/A	N/A	SI, B
3D-XL Triplanar Grid	Integrally formed	PP	N/A	N/A	60 (2.40)	60 (2.40)	N/A	N/A	N/A	N/A	N/A	N/A	SI, B
3D-SN+ Triplanar Grid	Integrally formed	PP	N/A	N/A	32 (1.26)	32 (1.26)	N/A	N/A	N/A	N/A	N/A	N/A	SI, B
MG 270 Mining Grid	Integrally formed	PP	Flame-retardant polymer	N/A	58 (2.30)	60 (2.40)	N/A	N/A	21.9 (1,500)	21.9 (1,500)	N/A	N/A	SI, B, W, E, S

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

$$[4] \text{ LTDS} = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
RF_{ID} = Reduction factor for installation damage
RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

« Geosynthetics recommends you contact the manufacturers before making any specifying/purchasing decisions »

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
Hanes Geo Components www.hanesgeo.com													
TerraGrid RX1100	Integrally formed	PP	NA	NA	25°(1.0°)	33°(1.3°)	8.5 (580)	13.4 (920)	12.4 (850)	19.0 (1300)	NA	NA	B, SI
TerraGrid RX1200	Integrally formed	PP	NA	NA	25°(1.0°)	33°(1.3°)	11.8 (810)	19.6 (1340)	19.2 (1310)	28.8 (1970)	NA	NA	B, SI
TerraGrid SX2020	Integrally formed	PP	NA	NA	35°(1.4°)	35°(1.4°)	13 (890)	13 (890)	20 (1370)	20 (1370)	NA	NA	B, SI
TerraGrid SX1515	Integrally formed	PP	NA	NA	33°(1.3°)	33°(1.3°)	10.2 (700)	10.2 (700)	15.0 (1030)	15.0 (1030)	NA	NA	B, SI
✦ nominal													
HUESKER Inc. www.huesker.com													
Basetrac® Grid PP 20	Knitted	PP	Polymeric	190 (5.6)	25 (1)	25 (1)	18 (1233)	18 (1233)	20/7 (1370)	20/7 (1370)	NA	NA	B, SI
Basetrac® Grid PP 30	Knitted	PP	polymeric	220 (6.5)	25 (1)	25 (1)	24 (1640)	24 (1640)	30/6 (2055)	30/6 (2055)	NA	NA	B, SI
HaTelit® C 40/17	Knitted	PET (grid) PP (textile)	Bituminous	270 (10.5)	40 (1.5)	40 (1.5)	NA	NA	50/10 (3425)	50/10 (3425)	NA	NA	A/O,PR
Fortrac® 35	Knitted	PET	Polymeric	185 (5.4)	25 (1)	25 (1)	17 (1165)	NA	35/10 (2400)	NA	22.7 (1558)	18.8 (1288)	W, E, S 4<pH<10
Fortrac® 55	knitted	PET	Polymeric	240 (7)	25 (1)	25 (1)	27 (1850)	NA	55/10 (3767)	NA	35.7 (2446)	29.5 (2022)	W, E, S 4<pH<10
Fortrac® 80	Knitted	PET	Polymeric	320 (9.4)	25 (1)	25 (1)	40 (2740)	NA	80/10 (5480)	NA	52 (3558)	43 (2941)	W, E, S 4<pH<10
Fortrac® 110	Knitted	PET	Polymeric	350 (10)	25 (1)	25 (1)	52 (3562)	NA	110/10 (7433)	NA	71.4 (4891)	59 (4043)	W, E, S 4<pH<10
Fortrac® 150	Knitted	PET	Polymeric	440 (13)	25 (1)	25 (1)	72 (4932)	NA	150/10 (10,275)	NA	97.4 (6672)	80.4 (5514)	W, E, S 4<pH<10
Fortrac® 200	Knitted	PET	Polymeric	530 (15.6)	25 (1)	25 (1)	90 (6165)	NA	200/10 (13,700)	NA	129.9 (8896)	107.3 (7352)	W, E, S 4<pH<10

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

[4]
$$LTDS = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
 RF_{ID} = Reduction factor for installation damage
 RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
- NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
Industrial Fabrics Inc. www.ind-fab.com													
BaseLok GeoGrid BX1100	Integrally Formed	PP	NA	NP	25 (1)	33 (1.3)	8.5 (580)	13.4 (920)	12.4 (850)	19 (1300)	NA	NA	SI, B
BaseLok GeoGrid BX1200	Integrally Formed	PP	NA	NP	25 (1)	33 (1.3)	11.8 (810)	19.6 (1340)	19.2 (1310)	28.8 (1970)	NA	NA	SI, B
BaseLok GeoGrid BX2020	Integrally Formed	PP	NA	NP	33 (1.3)	33 (1.3)	13 (890)	13 (890)	20 (1370)	20 (1370)	NA	NA	SI, B
BaseLok GeoGrid BX3030	Integrally Formed	PP	NA	NP	33 (1.3)	33 (1.3)	21 (1440)	21 (1440)	30 (2055)	30 (2055)	NA	NA	SI, B
BaseLok GeoGrid BX3030L	Integrally Formed	PP	NA	NP	57 (2.2)	57 (2.2)	21 (1440)	21 (1440)	30 (2055)	30 (2055)	NA	NA	SI, B
BaseLok FabGrid FG1100	Integrally Formed and Bonded	PP	NA	NP	25 (1)	33 (1.3)	8.5 (580)	13.4 (920)	12.4 (850)	19 (1300)	NA	NA	SI, B
BaseLok FabGrid FG1200	Integrally Formed and Bonded	PP	NA	NP	25 (1)	33 (1.3)	11.8 (810)	19.6 (1340)	19.2 (1310)	28.8 (1970)	NA	NA	SI, B
BaseLok FabGrid FG2020	Integrally Formed and Bonded	PP	NA	NP	33 (1.3)	33 (1.3)	13 (890)	13 (890)	20 (1370)	20 (1370)	NA	NA	SI, B
BaseLok FabGrid FG3030	Integrally Formed and Bonded	PP	NA	NP	33 (1.3)	33 (1.3)	21 (1440)	21 (1440)	30 (2055)	30 (2055)	NA	NA	SI, B
BaseLok FabGrid FG3030L	Integrally Formed and Bonded	PP	NA	NP	57 (2.2)	57 (2.2)	21 (1440)	21 (1440)	30 (2055)	30 (2055)	NA	NA	SI, B

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

$$[4] \text{ LTDS} = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
RF_{ID} = Reduction factor for installation damage
RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

« Geosynthetics recommends you contact the manufacturers before making any specifying/purchasing decisions »

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
L.E. Geosolutions, LLC www.legeosolutions.com													
LEgeo BX Type 1	Integrally formed	PP	NA	NA	25 (1.0)	36 (1.4)	8.5 (580)	13.4 (920)	12.4 (850)	19.0 (1,300)	NA	NA	SI, B
LEgeo BX Type 2	Integrally formed	PP	NA	NA	25 (1.0)	36 (1.4)	11.8 (810)	19.6 (1,340)	19.2 (1,310)	28.8 (1,970)	NA	NA	SI, B
LEgeo BX1515	Integrally formed	PP	NA	NA	40 (1.6)	40 (1.6)	7.0 (480)	7.0 (480)	15.0 (1,030)	15.0 (1,030)	NA	NA	SI, B
LEgeo BX2020	Integrally formed	PP	NA	NA	40 (1.6)	40 (1.6)	13.8 (950)	13.8 (950)	20.0 (1,370)	20.0 (1,370)	NA	NA	SI, B
LEgeo BX2525	Integrally formed	PP	NA	NA	40 (1.6)	40 (1.6)	16.9 (1,160)	16.9 (1,160)	25.0 (1,710)	25.0 (1,710)	NA	NA	SI, B
LEgeo BX3030	Integrally formed	PP	NA	NA	40 (1.6)	40 (1.6)	21.0 (1,439)	21.0 (1,439)	30.0 (2,050)	30.0 (2,050)	NA	NA	SI, B
LEgeo BX3030L	Integrally formed	PP	NA	NA	66 (2.6)	66 (2.6)	21.0 (1,439)	21.0 (1,439)	30.0 (2,050)	30.0 (2,050)	NA	NA	SI, B
LEgeo RG1010	Woven	Glass-fiber	Modified polymer	NA	12.5 (0.5)	12.5 (0.5)	NA	NA	100 (6,860)	100 (6,860)	NA	NA	A/O, PR
LEgeo RG2010	Woven	Glass-fiber	Modified polymer	NA	12.5 (0.5)	12.5 (0.5)	NA	NA	100 (6,860)	200 (13,720)	NA	NA	A/O, PR
Maccaferri Inc. www.maccaferri.com/us													
MacGrid WG5	Woven	Polyester	PVC or SBR	NP	varies	varies	32.5 (2227)	12.5 (856.5)	65 (4453.9)	25 (1713)		33.68 (2307.7)	Soil Reinforcement
MacGrid WG20	Woven	Polyester	PVC or SBR	NP	varies	varies	98.7 (6763.1)	16.45 (1127.2)	210 (14389.6)	35 (2398.3)		108.81 (7455.7)	Soil Reinforcement
ParaGrid 120/5	Aligned and Co-extruded	Polyester	LLDPE	480 (14.2)	426 (16.8)	42 (1.65)			120 (8223)	5 (342.6)	87.6 (6002)	81.6 (5591)	Soil Reinforcement
ParaLink 500	Aligned and Co-extruded	Polyester	LLDPE	1220 (36)	940 (37)	90 (3.6)			503 (34467)		367 (25147)	342 (23435)	Soil Reinforcement
MacGrid AR 10.7	Knitted	Glassfiber		530 (15.6)	12.7 (0.5)	12.7 (0.5)			100 (6850)	100 (6850)			Asphalt Reinforcement

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

[4]
$$LTDS = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
 RF_{ID} = Reduction factor for installation damage
 RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
- NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]	
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)					
					MD	XD	MD	XD	MD	XD				
Naue GmbH & Co. KG www.naue.com														
Secugrid 30/30 Q6	Laid and welded	PET	N/A	320 (9.44)	34 (1.34)	34 (1.34)	24 (1,645)	24 (1,645)	30 (2,055)	30 (2,055)	22.1 (1,511)	19.7 (1,348)	B, SI, W, E, S	
Secugrid 40/40 Q6	Laid and welded	PET	N/A	360 (10.62)	34 (1.34)	33 (1.30)	32 (2,195)	32 (2,195)	40 (2,740)	40 (2,740)	29.4 (2,015)	26.1 (1,793)	B, SI, W, E, S	
Secugrid 60/60 Q6	Laid and welded	PET	N/A	620 (18.29)	32 (1.26)	31 (1.22)	48 (3,289)	48 (3,289)	60 (4,111)	60 (4,111)	44.1 (3,023)	39.2 (2,689)	B, SI, W, E, S	
Secugrid 80/80 Q6	Laid and welded	PET	N/A	675 (19.91)	30 (1.18)	30 (1.18)	64 (4,385)	64 (4,385)	80 (5,482)	80 (5,482)	58.8 (4,031)	52.1 (3,567)	B, SI, W, E, S	
Secugrid 20/20 Q1	Laid and welded	PP	N/A	155 (4.57)	33 (1.30)	33 (1.30)	16 (1,096)	16 (1,096)	20 (1,370)	20 (1,370)	N/A	N/A	B, SI	
Secugrid 30/30 Q1	Laid and welded	PP	N/A	200 (5.90)	32 (1.26)	32 (1.26)	24 (1,645)	24 (1,645)	30 (2,055)	30 (2,055)	N/A	N/A	B, SI	
Secugrid 40/40 Q1	Laid and welded	PP	N/A	240 (7.08)	31 (1.22)	31 (1.22)	32 (2,193)	32 (2,193)	40 (2,740)	40 (2,740)	N/A	N/A	B, SI	
Secugrid 60/60 Q1	Laid and welded	PP	N/A	360 (10.62)	31 (1.22)	31 (1.22)	48 (3289)	48 (3289)	60 (4,110)	60 (4,110)	N/A	N/A	B, SI	
Secugrid 80/80 Q1	Laid and welded	PP	N/A	440 (12.98)	31 (1.22)	30 (1.18)	50 (3,426)	50 (3,426)	80 (5,482)	80 (5,482)	N/A	N/A	B, SI	
Combigrd 20/20 Q1 GRK 4 C	Laid and welded/ nonwoven	PP	N/A	155 (4.57)	33 (1.30)	33 (1.30)	16 (1,096)	16 (1,096)	20 (1,370)	20 (1,370)	N/A	N/A	B, SI	
Combigrd 30/30 Q1 GRK 4 C	Laid and welded/ nonwoven	PP	N/A	200 (5.90)	32 (1.34)	32 (1.34)	24 (1,645)	24 (1,645)	30 (2,055)	30 (2,055)	N/A	N/A	B, SI	
Combigrd 40/40 Q1 GRK 4 C	Laid and welded/ nonwoven	PP	N/A	240 (7.08)	31 (1.22)	31 (1.22)	32 (2,193)	32 (2,193)	40 (2,740)	40 (2,740)	N/A	N/A	B, SI	
Combigrd 60/60 Q1 GRK 4 C	Laid and welded/ nonwoven	PP	N/A	360 (10.62)	31 (1.22)	31 (1.22)	48 (3289)	48 (3289)	60 (4,110)	60 (4,110)	N/A	N/A	B, SI	

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours
and extrapolate to a 75-year time period.

$$[4] \text{ LTDS} = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
RF_{ID} = Reduction factor for installation damage
RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors
that may apply to design. Reduction factors are site specific
and should be reviewed on a per project basis. Contact the
manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were
requested to provide
minimum average
roll values (MARV).
All claims are the
responsibility of the
manufacturer.

« Geosynthetics recommends you contact the manufacturers before making any specifying/purchasing decisions »

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]	
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)					
					MD	XD	MD	XD	MD	XD				
Saint-Gobain ADFORS America www.adfors.com														
GlasGrid 8501	Knitted	FG	EP	397 (11.7)	12.5 (0.5)	12.5 (0.5)	N/A	N/A	100 (6852)/ 3%	100 (6852)/ 3%	N/A	N/P	A/O, PR	
GlasGrid 8511	Knitted	FG	EP	397 (11.7)	25 (1.0)	25 (1.0)	N/A	N/A	100 (6852)/ 3%	100 (6852)/ 3%	N/A	N/P	A/O, PR	
GlasGrid 8502	Knitted	FG	EP	610 (18.0)	12.5 (0.5)	12.5 (0.5)	N/A	N/A	100 (6852)/ 3%	200 (13,704)/ 3%	N/A	N/P	A/O, PR	
GlasGrid 8512	Knitted	FG	EP	610 (18.0)	25 (1.0)	19 (0.75)	N/A	N/A	100 (6852)/ 3%	200 (13,704)/ 3%	N/A	N/P	A/O, PR	
GlasGrid 8501 TF	Knitted	FG	EP	400 (11.8)	12.5 (0.5)	12.5 (0.5)	N/A	N/A	100 (6852)/ 3%	100 (6852)/ 3%	N/A	N/P	A/O, PR	
GlasGrid 8511 TF	Knitted	FG	EP	400 (11.8)	25 (1.0)	25 (1.0)	N/A	N/A	100 (6852)/ 3%	100 (6852)/ 3%	N/A	N/P	A/O, PR	
Solmax International Inc. www.solmax.com														
Miragrid 2XT	Woven	PET	PVC	NP	NP	NP	NA	NA	29.2 (2000)	29.2 (2000)	20.3 (1389)	17.5 (1202)	W, S, E	
Miragrid 3XT	Woven	PET	PVC	NP	NP	NP	15.4 (1056)	NA	51.1 (3500)	NA	35.5 (2431)	30.7 (2104)	W, S, E	
Miragrid 5XT	Woven	PET	PVC	NP	NP	NP	25.4 (1740)	NA	68.6 (4700)	NA	47.6 (3264)	41.2 (2826.0)	W, S, E	
Miragrid 10XT	Woven	PET	PVC	NP	NP	NP	45.5 (3120)	NA	138.6 (9500)	NA	96.1 (6597)	83.3 (5712.0)	W, S, E	
Miragrid 24XT	Woven	PET	PVC	NP	NP	NP	102.1 (7000)	NA	400.0 (27415)	NA	277.8 (19038)	240.5 (16483.0)	W, S, E	

Note: Additional strengths and styles of Miragrid are available.

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

$$[4] \text{ LTDS} = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
RF_{ID} = Reduction factor for installation damage
RF_D = Reduction factor for durability

NOTE: This equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
- NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
Strata Systems Inc. www.geogrid.com													
StrataMesh	Woven	PP	NA	NP	NP	NP	NP	NP	25.8 (1764)	27.5 (1884)	NA	NA	E, W, S
SB10	Integrally formed	PP	NA	NA	36.0 (1.4)	38.0 (1.5)	7 (479)	7 (479)	15 (1,027)	15 (1,027)	NA	NA	SI, B
SB11	Integrally formed	PP	NA	NA	26.0 (1.0)	35.0 (1.4)	9 (580)	13 (920)	12 (850)	19 (1,300)	NA	NA	SI, B
SB12	Integrally formed	PP	NA	NA	26.0 (1.0)	35.0 (1.4)	12 (810)	10 (1340)	19 (1,310)	29 (1,970)	NA	NA	SI, B
SB30	Integrally formed	PP	NA	NA	36.0 (1.4)	34.0 (1.3)	20 (1370)	20 (1370)	30 (2,055)	30 (2,055)	NA	NA	SI, B
SGB 30	Precision knitted	PET	Polymeric	NP	NP	NP	14 (926)	(9) 617	30 (2,055)	30 (2,055)	20 (1437)	17 (1187)	E, W, S, SI, B
SGB 80	Precision knitted	PET	Polymeric	NP	NP	NP	36 (2,467)	23 (1576)	80 (5,482)	80 (5,482)	55 (3833)	46 (3168)	E, W, S, SI, B
SGB 100	Precision knitted	PET	Polymeric	NP	NP	NP	45 (3,084)	26 (1781)	100 (6,852)	100 (6,852)	69 (4792)	57 (3960)	E, W, S, SI, B
SGU 40	Precision knitted	PET	Polymeric	NP	23.2 (0.9)	21.3 (0.9)	24 (1,644)	NA	40 (2,740)	NA	27 (1916)	23 (1583)	E, W, S
SGU 60	Precision knitted	PET	Polymeric	NP	17.9 (0.7)	21.1 (0.9)	36 (2,466)	NA	60 (4,111)	NA	41 (2874)	34 (2375)	E, W, S
SGU 80	Precision knitted	PET	Polymeric	NP	21.1 (0.8)	21.2 (0.9)	42 (2,877)	NA	80 (5,482)	NA	55 (3833)	46 (3168)	E, W, S
SGU 100	Precision knitted	PET	Polymeric	NP	62.2 (2.5)	28.4 (1.1)	46 (3,151)	NA	100 (6,852)	NA	69 (4791)	57 (3960)	E, W, S
SGU 120	Precision knitted	PET	Polymeric	NP	22.2 (0.9)	25.8 (1.0)	56 (3,837)	NA	120 (8,222)	NA	83 (5749)	69 (4751)	E, W, S
SGU 150	Precision knitted	PET	Polymeric	NP	62.6 (2.5)	25.1 (1.0)	69 (4,727)	NA	150 (10,278)	NA	104 (7187)	86 (5940)	E, W, S
SGU 180	Precision knitted	PET	Polymeric	NP	53.4 (2.1)	26.3 (1.0)	81 (5,551)	NA	180 (12,334)	NA	125 (8625)	104 (7128)	E, W, S
SGU 200	Precision knitted	PET	Polymeric	NP	63.3 (2.5)	24.5 (1.0)	90 (6,168)	NA	200 (13,704)	NA	139 (9583)	115 (7920)	E, W, S
SGU 300	Precision knitted	PET	Polymeric	NP	63.0 (2.5)	23.5 (0.9)	115 (7,880)	NA	300 (20,556)	NA	209 (14374)	173 (11880)	E, W, S
SGU 400	Precision knitted	PET	Polymeric	NP	42.0, 12.0, 12.0 (1.7, 0.5, 0.5)	16.0 (0.6)	140 (9,593)	NA	400 (27,408)	NA	279 (19166)	231 (15840)	E, W, S

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

$$[4] \text{ LTDS} = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
RF_{ID} = Reduction factor for installation damage
RF_D = Reduction factor for durability


NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

Top Quality Products Unrivalled Technical Support

- **Made in America** at a new plant in Alpharetta, GA
- L.E. Geosolutions is the exclusive distributor for TMP America, Inc.
- Lowest geogrid prices in the industry
- Full design & technical support services

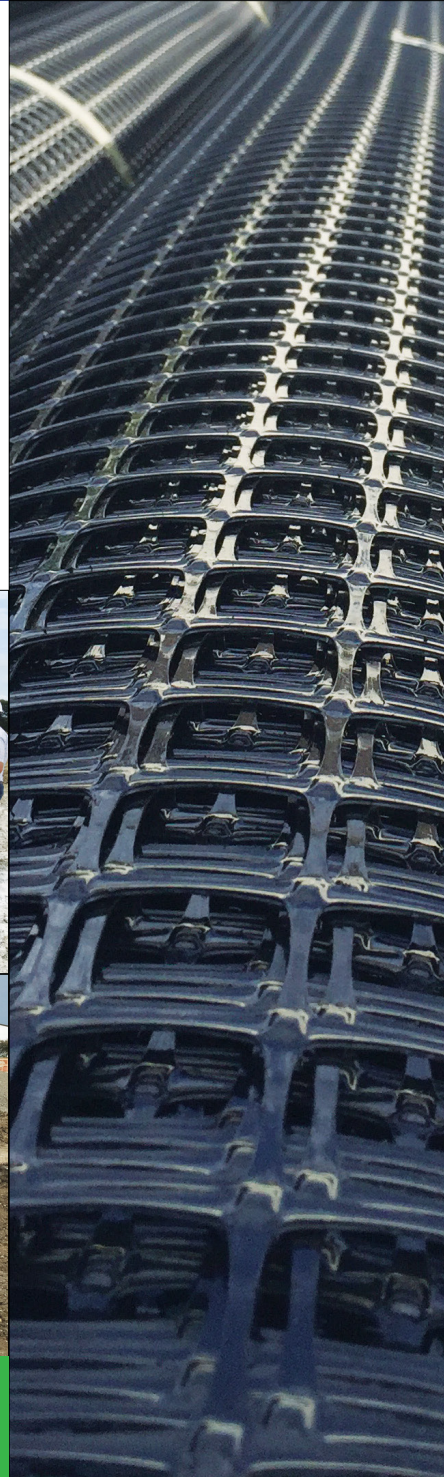

www.LEgeosolutions.com

LE

geosolutions

L.E. Geosolutions, LLC
Contact: Jim Penman
Tel: 404-368-0052

E-mail: jim.penman@LEgeosolutions.com

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m² (oz/yd²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
Synteen Technical Fabrics www.synteen.com													
SF20	Woven	PET	PVC	NA	25 (1.00)	20 (0.8)	NA	NA	39.4 (2700)	NA	26.1 (1788)	22.6 (1548)	S, W, B, E, PR
SF35	Woven	PET	PVC	NA	20 (0.79)	25 (1.00)	NA	NA	52.5 (3600)	NA	34.8 (2384)	30.1 (2064)	S, W, B, E, PR
SF55	Woven	PET	PVC	NA	20 (0.79)	25 (1.00)	NA	NA	73.0 (5000)	NA	48.3 (3311)	41.8 (2867)	S, W, B, E, PR
SF65	Woven	PET	PVC	NA	20 (0.79)	25 (1.00)	NA	NA	90.5 (6200)	NA	59.9 (4106)	51.9 (3555)	S, W, B, E, PR
SF80	Woven	PET	PVC	NA	20 (0.79)	25 (1.00)	NA	NA	110.2 (7550)	NA	73.0 (5000)	63.2 (4329)	S, W, B, E, PR
SF90	Woven	PET	PVC	NA	16 (0.63)	25 (1.00)	NA	NA	131.3 (9000)	NA	87.0 (5960)	75.3 (5160)	S, W, B, E, PR
SF110	Woven	PET	PVC	NA	16 (0.63)	25 (1.00)	NA	NA	150.3 (10,300)	NA	99.6 (6821)	86.2 (5906)	S, W, B, E, PR
SF180	Woven	PET	PVC	NA	13 (0.51)	25 (1.00)	NA	NA	211.6 (14,500)	NA	140.1 (9603)	121.3 (8314)	S, W, B, E, PR
SF190	Woven	PET	PVC	NA	10 (0.39)	25 (1.00)	NA	NA	300.1 (20560)	NA	198.7 (13616)	172.0 (11789)	S, W, B, E, PR
SF350	Woven	PET	PVC	NA	10 (0.39)	25 (1.00)	NA	NA	402.8 (27,600)	NA	266.8 (18278)	231.0 (15825)	S, W, B, E, PR

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

$$[4] \text{ LTDS} = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
RF_{ID} = Reduction factor for installation damage
RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

« Geosynthetics recommends you contact the manufacturers before making any specifying/purchasing decisions »

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
TechFab India www.techfabindia.com													
TechGrid -TGU-600/30	Knitted	Polyester	Polymeric Proprietary	NP	30 (1.18)	12 (0.47)	NA	NA	600 (41113)	30 (2056)	413.8 (28354)	379.1 (25977)	W, S, E
TechFab Nonwoven Geocomposite TGC-75/75	Knitted	PET / PP NW	NA	NP	NP	NP	32 (2193)	32 (2193)	75 (5139)	75 (5139)	49.0 (3358)	22.94 (1572)	SI
TechGrid PP 4040	Extruded Biaxial	PP	NA	NA	30(1.18)	30(1.18)	28.0 (1918)	28.0 (1918)	40 (2741)	40 (2741)	NP	NP	R, E
TECHSTRAP 100	Extrusion Coating	Polyester + LLDPE	Extrusion	NP	NP	NP	35 (7868)	NP	100 (22481)	NP	NP	55.94 (12576)	reinforcement for retaining wall
Tensar International Corp. www.tensar-international.com													
UX1200 (BX Class 2)	Integrally formed	PP	NA	NA	25 [A] (1.0) [A]	33 [A] (1.3) [A]	11.8 (810)	19.6 (1340)	19.2 (1310)	28.8 (1970)	NA	NA	SI, B
TX160	Integrally formed	PP	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	SI, B
TX190L	Integrally formed	PP	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	SI, B
InterAx NX650 Geogrid	multilayer integrally formed	PP	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	SI, B
InterAx NX750 Geogrid	multilayer integrally formed	PP	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	SI, B
InterAx NX850 Geogrid	multilayer integrally formed	PP	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	SI, B
InterAx FilterGrid NX850-FG	multilayer integrally formed and laminated	PP	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	SI, B
GlasGrid 8511	Knitted	FG	EP	405 (12)	25 (1.0)	25 (1.0)	NA	NA	100 @ 3% (6720)	100 @ 3% (6720)	NA	NP	A/O, PR
GlasGrid 8511TF	Knitted w/ tackfilm (TF)	FG TF	EP	432 (12.7)	25 (1.0)	25 (1.0)	NA	NA	100 @ 3% (6720)	100 @ 3% (6720)	NA	NP	A/O, PR
UX1100HS/MSE ^{♦♦}	Integrally formed	HDPE	NA	NA	430 (17.0)	NA	27 (1850)	NA	58 (3970)	NA	22.3 (1530) [♦]	21.2 (1450) [♦]	W, E, S
UX1400HS/MSE ^{♦♦}	Integrally formed	HDPE	NA	NA	460 (18.0)	NA	31 (2130)	NA	70 (4800)	NA	26.9 (1850) [♦]	25.6 (1760) [♦]	W, E, S
UX1500HS/MSE ^{♦♦}	Integrally formed	HDPE	NA	NA	460 (18.0)	NA	52 (3560)	NA	114 (7810)	NA	43.8 (3000) [♦]	41.8 (2860) [♦]	W, E, S
UX1600HS/MSE ^{♦♦}	Integrally formed	HDPE	NA	NA	460 (18.0)	NA	58 (3980)	NA	144 (9870)	NA	55.4 (3800) [♦]	52.7 (3620) [♦]	W, E, S
UX1700HS/MSE ^{♦♦}	Integrally formed	HDPE	NA	NA	460 (18.0)	NA	75 (5140)	NA	175 (11,990)	NA	67.3 (4610) [♦]	64.1 (4390) [♦]	W, E, S

♦Creep rupture extrapolated to a 120-year time period per ASTM D 5262

♦♦UXxx00HS geogrids use for non-connected system only

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

[4]
$$LTDS = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
 RF_{ID} = Reduction factor for installation damage
 RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
- NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

Product Name	Manufacturing Process	Polymer Type [1]	Coating Type [1]	Dimensional Properties [2]			Tensile Strength/[Elongation] ASTM D 6637 [2] kN/m (lb/ft)/%				Creep Limited Strength-MD [3] ASTM D 5262 kN/m (lb/ft)	LTDS GRI GG4-MD [4] kN/m (lb/ft) (in sand)	Manufacturer's Suggested Applications [5]
				Mass/Unit Area ASTM D 5261 g/m ² (oz/yd ²)	Aperture Size mm (in)		Strength @ 5% Strain		Ultimate Strength/% (Tult)				
					MD	XD	MD	XD	MD	XD			
Titan Environmental Containment Ltd. www.titanenviro.com													
Spartan Road Grid™ 10 Fiberglass Geogrid	Woven	FG	Polymeric	420 (12.5)	12.7 (0.5)	12.7 (0.5)	NA	NA	100 (6854)	100 (6854)	NA	NA	A/O, PR
Spartan Road Grid™ 11 Fiberglass Geogrid	Woven	FG	Polymeric	420 (12.5)	25.4 (1.0)	25.4 (1.0)	NA	NA	100 (6854)	100 (6854)	NA	NA	A/O, PR
Spartan Road Grid™ 20 Fiberglass Geogrid	Woven	FG	Polymeric	610 (18.1)	12.7 (0.5)	12.7 (0.5)	NA	NA	100 (6854)	200 (13,708)	NA	NA	A/O, PR
Spartan Road Grid™ 10C Composite Geogrid	Woven	FG PP	Polymeric	570 (16.9)	12.7 (0.5)	12.7 (0.5)	NA	NA	100 (6854)	100 (6854)	NA	NA	A/O, PR

- [1] PET = Polyester, HDPE = High density polyethylene
PVC = Polyvinyl chloride
EP = Elastomeric Polymer
PVA = Polyvinyl alcohol
FG = Fiberglass
PP = Polypropylene
[2] MD = Machine direction
XD = Cross-machine direction
[3] Test per ASTM D 5262, for a minimum of 10,000 hours and extrapolate to a 75-year time period.

$$[4] \text{ LTDS} = \frac{T_{ult}}{RF_{CR} \times RF_{ID} \times RF_D}$$

RF_{CR} = Reduction factor for creep
RF_{ID} = Reduction factor for installation damage
RF_D = Reduction factor for durability

NOTE: this equation does not include other reduction factors that may apply to design. Reduction factors are site specific and should be reviewed on a per project basis. Contact the manufacturer for recommendations.

- [5] A/O = Asphalt overlay
B = Base reinforcement
E = Embankments
PR = Pavement reinforcement
S = Slopes
SI = Subgrade improvement
W = Walls
NP = Not provided by manufacturer
NA = Not applicable, per manufacturer
* = Not for sale in U.S.

Companies were requested to provide minimum average roll values (MARV). All claims are the responsibility of the manufacturer.

« Geosynthetics recommends you contact the manufacturers before making any specifying/purchasing decisions »